

HOEI-JAPAN DAIEN KOGYO

HUME PIPE PRODUCTION MACHINE



HOEI
JAPAN

HOEI COMPANY LTD.

6-30, KAMIUBAKO, SAKAE-CHO, TOYOAKE-CITY
AICHI-PREF, 470-1162, JAPAN

TEL +81-562-97-1177 FAX +81-562-97-1787

E-MAIL : info@hoei-japan.com


URL : <http://www.hoei-japan.com/>

U mold screw 4 range injection machine



Features

- Hopper U mold.
- It can drop cement by an agitator by force from hopper.
- Injection Traveling can change the speed smoothly by the inverter control.
- The freshly mixed concrete in the hopper becomes smooth by an agitator.
- For low slump.
- It's compact and easy to maintain.

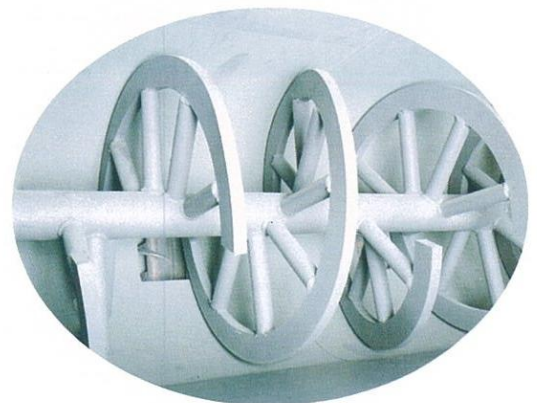


Specification

Specification	Application size $\phi 150 \sim \phi 350$	$\phi 400 \sim \phi 700$
Diameter of injection pipe	5 inch	8inch
Operation	Remote control	Remote control
Screw Motor	3.75kW 4P1/20	3.75kW 4P1/30
Body traveling motor	1.5kW4P 1/60	2.2kW 4P1/30
Hopper traveling motor	2.2kW1/30	3.75kW 4P1/30
Agitator motor	3.7kW 4P1/289	3.75kW 4P1/289
Machine weight	about5t	about8.5t


Vibration formation machine

Wide diameter vibration formation machine

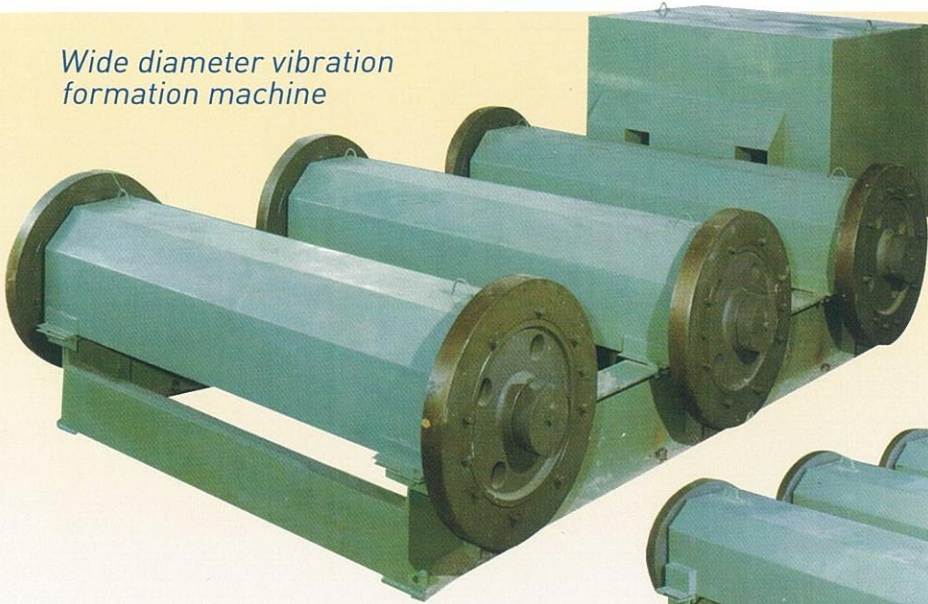

Features

- ① Possible to make 0 slump by vibration.
- ② Making good progress with the strength of a product.

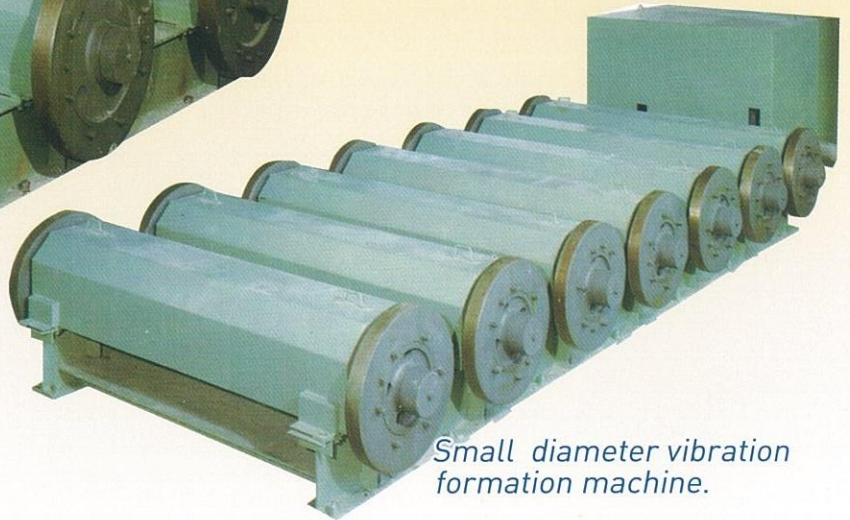

Small diameter vibration formation machine.

Main specification

Shaft	Small diameter	Middle diameter	Large diameter
Tire	Bearing diameter 70φ	Bearing diameter 90φ	Bearing diameter 110φ
Motor		Inverter control	
Application size	150φ ~ 350φ	400φ ~ 600φ	700φ ~ 1,200φ


Jig hang



Large pipe, a jig to hang (over 2000φ)



Small pipe, a jig to hang

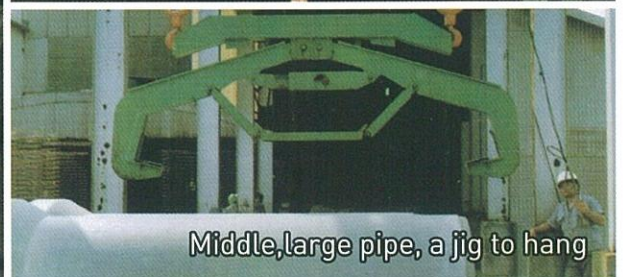

Middle, large pipe, a jig to hang

New

Promise you prosperity by using our technology and idea..... **HOEI-JAPAN**

Screw type two range injection machine

Features

- Change the injection pipe pace(400 stroke) and possible to inject 2 pipes to a middle and large formation machine.
- When you change the screw, you can insert it in the rear catcher by one-touch control.
- Low slump is possible because the hopper is divided by upper and lower part.
- Injection traveling is possible for smooth speed change by the inverter control.
- With hopper mixer.
- It's compact and easy to maintain.

Specification

Application size	400φ ~ 1,350φ
Diameter of injection pipe	8 ~ 10 inch
Thickness of screw wing	12mm
Upper screw (stirrer)	5.5kW 4P1/30
Body traveling	2.2kW 4P1/60
Hopper upper and lower	3.75kW 4P1/20
Lower screw	5.5kW 4P1/30
Change pitch	160φ×400ST
Operation	Remote control

Injection pipe pitch change

